
ECLIPSE NO. 2 Post Hydrant

NON-FREEZING

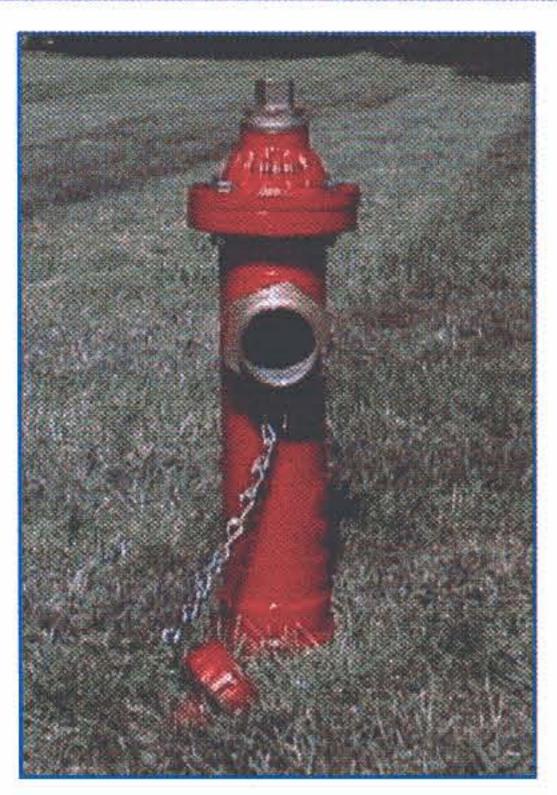

- New full-port nozzle.
- · One or two nozzles.
- Any size you wish up to 2 1/2" NST in size.

Available with any depth of bury you desire.

Inlet can be 2", 21/2" or 3" iron pipe. Mechanical joints 2", 3" and 4" also available.

You can replace interior parts without disturbing any connections. Just unbolt the top cap and withdraw the inside working parts.

All hydrants now furnished with ductile iron pipe trench stocks to provide corrosion resistance for longer life.

Has 2 - 3/16" valve opening.

➤ DRAIN





813 HEMPSTEAD STREET / ST. LOUIS, MISSOURI 63102 314-231-8738 FAX# 314-231-2820 http://www.hydrants.com Call for Drawings
and Specs for
AutoCad
1-800-231-3990
(toll free)
or download
from website

Distributed by:



36 Hudson Rd Sudbury MA 01776 ■



800-225-4616 www.tisales.com

THE EASIEST TO SERVICE



UNDO 4 BOLTS




PULL UP TOP CAP



PULL OUT ROD



INSPECT PLUNGER

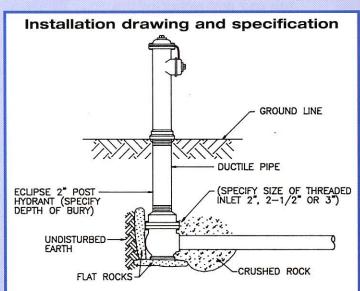

Hydrants shall be self-draining, non-freezing, compression type with $2-3/_{16}$ " main valve opening. Inlet connection shall be (2" IP, $2-1/_{2}$ " IP, 3" IP, 2" MJ, 3" MJ or 4" MJ). Outlet shall be $(1-1/_{4}$ ", $1-1/_{2}$ ", 2" or $2-1/_{2}$ " IP or NST).

Hydrants shall have a 3" ductile iron pipe riser with a cast iron top stock, and non-turning operating rod. Principal interior operating parts shall be brass and removable from the hydrant for servicing without excavating the hydrant.

Hydrants shall be set in 4 cubic feet of crushed stone to allow for proper drainage of the hydrant. Recommendations of the AWWA should be followed when installing the hydrants.

Post hydrants shall be Eclipse No. 2 Post Hydrants as manufactured by John C. Kupferle Foundry Company, St. Louis, Missouri.



EVERY HYDRANT MARKED WITH "OPEN" ARROW AND TOLL-FREE NUMBER



HANDWHEEL OPTION



LOCKING WRENCH OPTION







Call Toll Free 1-888-HYDRANT