



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx style)



10" & 12" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S

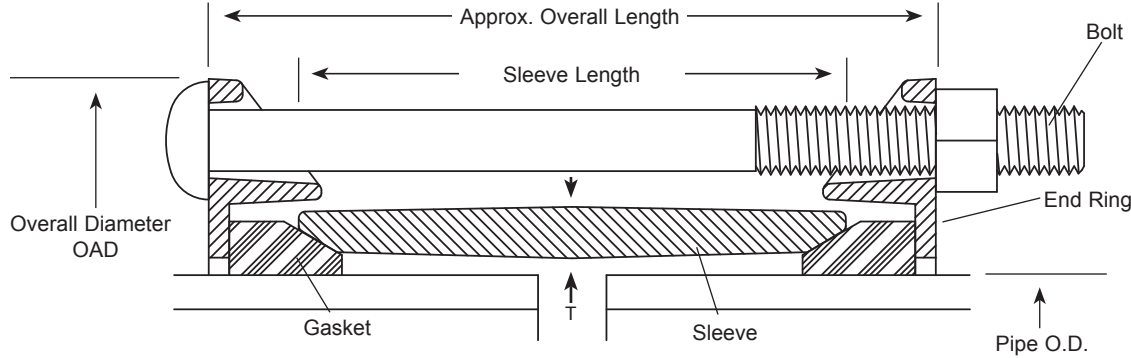

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. #	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. #	END RING COLOR	CENTER SLEEVE		BOLTS			APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.					
10"	10.00	Red	X	10.75	Red	6"	7/16"	5/8"	9"	6	7-1/8"	15-11/16"	48	FC2A-1000-1075	
	10.75	Red		10.75	Red									FC2A-1075-1075	
	10.75	Red		11.10 - 11.40	Blk									FC2A-1075-1140	
	10.75	Red		11.42 - 11.77	Blk									FC2A-1075-1177	
	10.75	Red		11.77 - 12.12	Wht/Gry									FC2A-1075-1212	
	11.10 - 11.40	Blk		11.10 - 11.40	Blk									FC2A-1140-1140	
	11.10 - 11.40	Blk		11.42 - 11.77	Blk									FC2A-1140-1177	
	11.10 - 11.40	Blk		11.77 - 12.12	Wht/Gry									FC2A-1140-1212	
	11.42 - 11.77	Blk		11.42 - 11.77	Blk									FC2A-1177-1177	
	11.42 - 11.77	Blk		11.77 - 12.12	Wht/Gry									FC2A-1177-1212	
	11.42 - 11.77	Blk		11.77 - 12.12	Wht/Gry									FC2A-1212-1212	
	11.77 - 12.12	Wht/Gry		11.77 - 12.12	Wht/Gry									FC2A-1275-1275	
12"	12.75	Blk	X	12.75	Blk	6"	1/2"	5/8"	9"	7	7-1/8"	18"	56	FC2A-1275-1275	
	12.75	Blk		13.20 - 13.50	Blk									FC2A-1275-1350	
	12.75	Blk		13.69 - 14.04	Wht/Gry									FC2A-1275-1404	
	12.75	Blk		14.03 - 14.38	Wht/Gry									FC2A-1275-1438	
	13.20 - 13.50	Blk		13.20 - 13.50	Blk									FC2A-1350-1350	
	13.20 - 13.50	Blk		13.69 - 14.04	Wht/Gry									FC2A-1350-1404	
	13.20 - 13.50	Blk		14.03 - 14.38	Wht/Gry									FC2A-1350-1438	
	13.69 - 14.04	Wht/Gry		13.69 - 14.04	Wht/Gry									FC2A-1404-1404	
	13.69 - 14.04	Wht/Gry		14.03 - 14.38	Wht/Gry									FC2A-1404-1438	
	13.69 - 14.04	Wht/Gry		14.03 - 14.38	Wht/Gry									FC2A-1438-1438	
	14.03 - 14.38	Wht/Gry		14.03 - 14.38	Wht/Gry										

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Ductile Iron per ASTM A536 (65-45-12)
- End Rings: Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Black Alkyd Enamel Shop Coat NSF 61 Approved
- Gasket: Molded SBR Rubber per ASTM D2000, M4AA810
- NSF61: NSF 61 Approved
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

08/04/2016

Submitted By:



36 Hudson Rd
 Sudbury MA 01776



800-225-4616
 www.tisales.com