



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx style)



14" - 24" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH THE SAME OR DIFFERENT O.D.'S

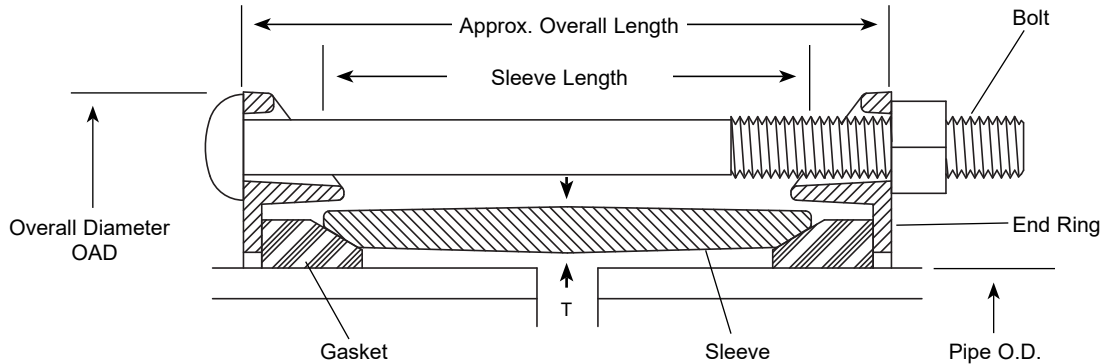

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. #	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. #	END RING COLOR	CENTER SLEEVE		BOLTS		APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓SUBMITTED ITEM(S)	
						LGTH.	APPROX. (T)THICKNESS	DIA.	LGTH.						QTY.
14"	15.30 - 15.70	Blk	X	15.30 - 15.70	Blk	6"	1/2"	5/8"	9"	9	7-1/8"	21"	83	FC2A-1570-1570	
	15.30 - 15.70	Blk		16.00 - 16.35	Red										FC2A-1570-1635
	15.30 - 15.70	Blk		16.40 - 16.88	Wht/Gry										FC2A-1570-1688
	16.00 - 16.35	Red		16.00 - 16.35	Red										FC2A-1635-1635
	16.00 - 16.35	Red		16.40 - 16.88	Wht/Gry										FC2A-1635-1688
	16.40 - 16.88	Wht/Gry		16.40 - 16.88	Wht/Gry										FC2A-1688-1688
16"	17.40 - 17.80	Blk	X	17.40 - 17.80	Blk	6"	1/2"	5/8"	9"	10	7-1/8"	23-5/16"	103	FC2A-1780-1780	
	17.40 - 17.80	Blk		18.45 - 18.97	Wht/Gry										FC2A-1780-1897
	17.40 - 17.80	Blk		18.90 - 19.20	Wht/Gry										FC2A-1780-1920
	18.45 - 18.97	Wht/Gry		18.45 - 18.97	Wht/Gry										FC2A-1897-1897
	18.45 - 18.97	Wht/Gry		18.90 - 19.20	Wht/Gry										FC2A-1897-1920
	18.90 - 19.20	Wht/Gry		18.90 - 19.20	Wht/Gry										FC2A-1920-1920
18"	19.50 - 20.00	Blk	X	19.50 - 20.00	Blk	7"	1/2"	5/8"	10-1/2"	11	8-1/8"	24-1/2"	117	FC2A-2000-2000	
20"	21.60 - 22.06	Blk	X	21.60 - 22.06	Blk	7"	9/16"	5/8"	10-1/2"	12	8-1/8"	26-13/16"	137	FC2A-2206-2206	
24"	25.80 - 26.32	Blk	X	25.80 - 26.32	Blk	10"	11/16"	5/8"	13-1/2"	14	11-1/16"	31-1/8"	211	FC2A-2632-2632	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Ductile Iron per ASTM A536 (65-45-12)
- End Rings: Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Black Alkyd Enamel Shop Coat NSF61 Approved
- Gasket: Molded SBR Rubber per ASTM D2000
- NSF61: NSF 61 Approved
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

05/11/18

Submitted By:



36 Hudson Rd
 Sudbury MA 01776



800-225-4616
 www.tisales.com